

Quotation request – KM26S – side mount

Factory contact: _____

Seller information

Name: _____
Phone: _____
Email: _____
Company or LBU: _____
Main phone: _____
Fax: _____

End user information

Name: _____
Phone: _____
Email: _____
Company or LBU: _____
Main phone: _____

Note: This information will be required before accepting an order.
*All fields required

Tag ID#: _____

Process conditions

Application for (select one): total level – interface level – total and interface

Upper fluid operating sp. gravity: _____

Minimum specific gravity: _____

Lower fluid second sp. gravity: _____

Fluid(s): _____

If water, steam service? Yes No

Operating temp: _____

Max. temp: _____ Min. temp: _____

Operating pressure: _____

Max. pressure: _____

Minimum ambient temperature: _____

High vibration environment (such as compressor)? Yes No

Chamber and float details

Chamber material: _____

Float material: _____

Connection material: _____

Center to center/ measuring length: _____

Vent / drain type and size: _____

Process connection

Type: _____

Size: _____

Rating: _____

Indicator details

Select: ___ Shuttle or

___ Bar graph (choose color combination) yellow/black – red/white

Scale (select one): ft. / in. – running in. (1/2 in. div.) – running in. (1/8 in.) – meter / cm – custom _____

Special requirements: _____

Accessories Required (choose all that apply)

___ Chamber insulation

___ Magnetic particle traps

___ Electric heat tracing

___ Specialty process connection (specify type: _____)

___ Steam jacket

___ Switches (specify type: _____)

___ Steam tracing

___ Transmitter – _____

Approval or Documentation required:

___ CRN

___ PED

___ NACE


___ ASME

___ ABS

___ Other

...Quotation request – KM26S – side mount

Choose the appropriate configuration below or attach a sketch

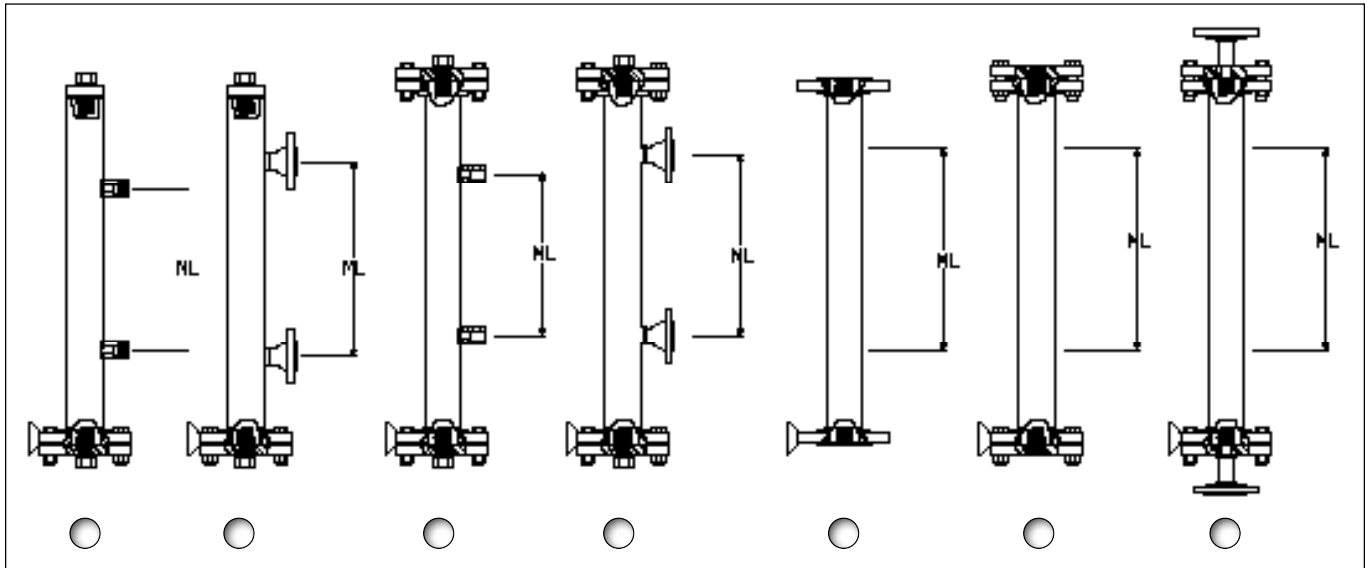


Select orientation (only 1 accessory allowed per position)

Indicator: __90° __180° __270°

LMT transmitter: __90° __180° __270°

Switches: __90° __180° __270°



Note: Overall length will always be greater than measuring length (ML). Please specify if a max overall length is required.

